



## FRS-70 Centrifugal Feeder

*Designed for Quiet, High Speed Feeding*



**Product Overview:**

Hoppmann's FRS-70 is specifically designed to feed a wide range of large bottles and parts. The delivery rate varies from moderate to high speed depending on part characteristics. The FRS-70 is engineered to interface with Hoppmann prefeeders, accumulating conveyors, assembly systems and other downstream equipment.

**Product Specifications:**

	<u>ANSI</u>	<u>Metric</u>
A. Overall Width at Exit Zone	108"	2743mm
B. Overall Width	108"	2743mm
C. Overall Height	85" ± 3"	2159mm ± 76mm
D. Discharge Height	53" ± 3"	1386mm ± 76mm
E. Bowl Inside Diameter	66"	1676mm
F. Rim Width	6.7"	169mm
G. Scallop Length	15"	381mm

**Standard Models:**

	<u>RS70XXXDSA</u>	<u>RS70XXXASA</u>
Part Number	DC	AC
Motor Style	90V	208-230/480V
Motor Voltage	1 hp	746W
Horsepower	3500 lbs	1587 kg
Weight Untooled		

**Standard Features:**


- Aluminum bowl with stainless steel walls
- Hinged polycarbonated cover with safety interlocks
- Air clutch
- Backup ring
- Panel mount controller card

**Available Options:**

- Washdown motor
- Urethane scallop kit
- NEMA 1 encased controller

**Required Accessories:**

FRS Series Scallop Kit ..... URTHCAST64

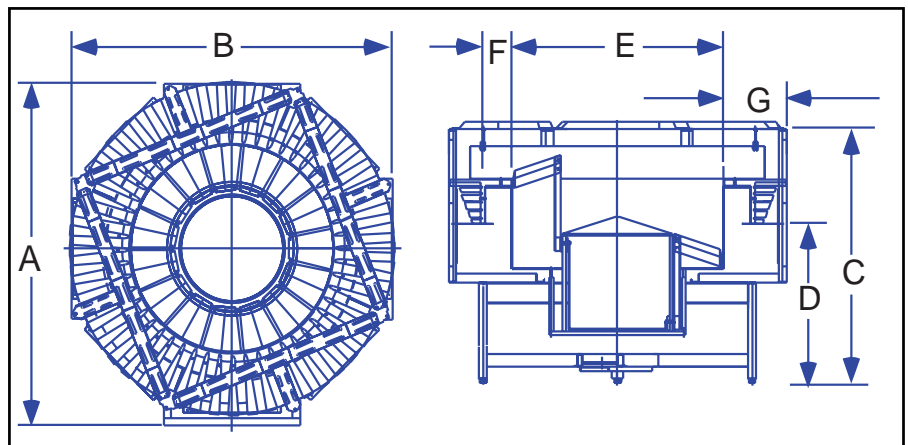

Hoppmann Corporation strives to improve its products and reserves the right to change or discontinue specifications & designs shown in this brochure without notice and without incurring obligation. 06/05

**We Can Handle It.**

**Your Local Representative:**

Automatic Feeder Company Inc.  
 921 Albion Avenue Schaumburg, IL 60193-4550  
 Phone: (847) 534-2300 Toll-Free: (888) 534-2340 Fax: (847) 534-2354  
 www.automaticfeeder.com Email: sales@automaticfeeder.com

